

# BL880M1IR

8 MP IP bullet camera / Caméra balle IP 8 MP

## Quick Start Guide / Guide Rapide



Find additional manuals, the datasheet, the EU Declaration of Conformity and the latest firmware for this product at:

<http://www.tkhsecurity.com/support-files>

Plus d'information sur le site ci-dessus.




# SECURITY SOLUTIONS


### Unpack / Déballer



### Connect / Connecter

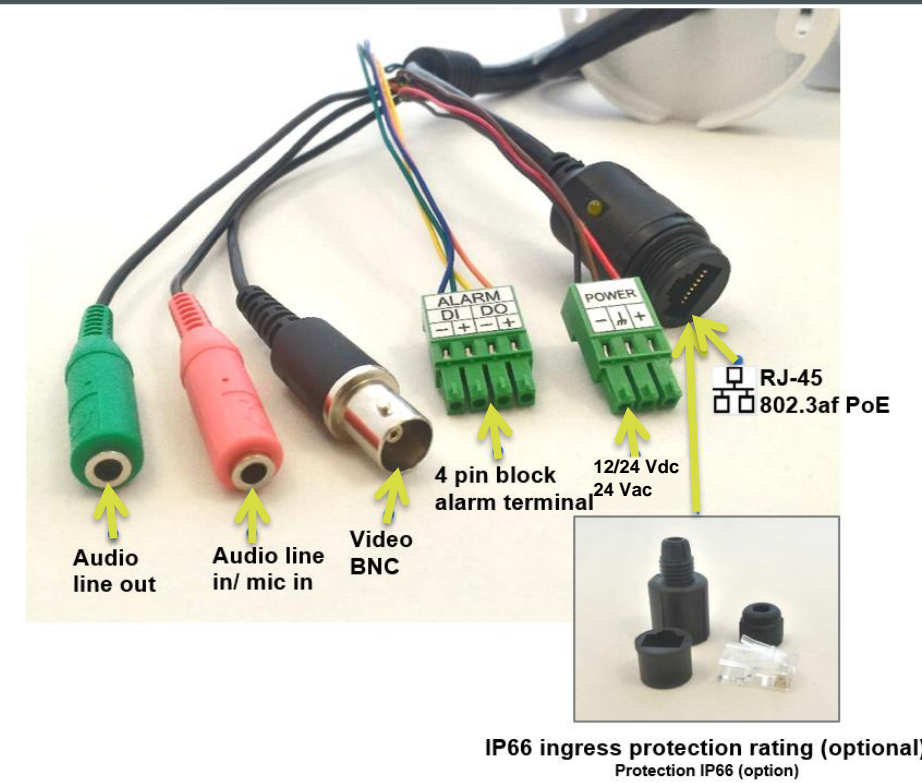

### Point camera / Pointer la caméra

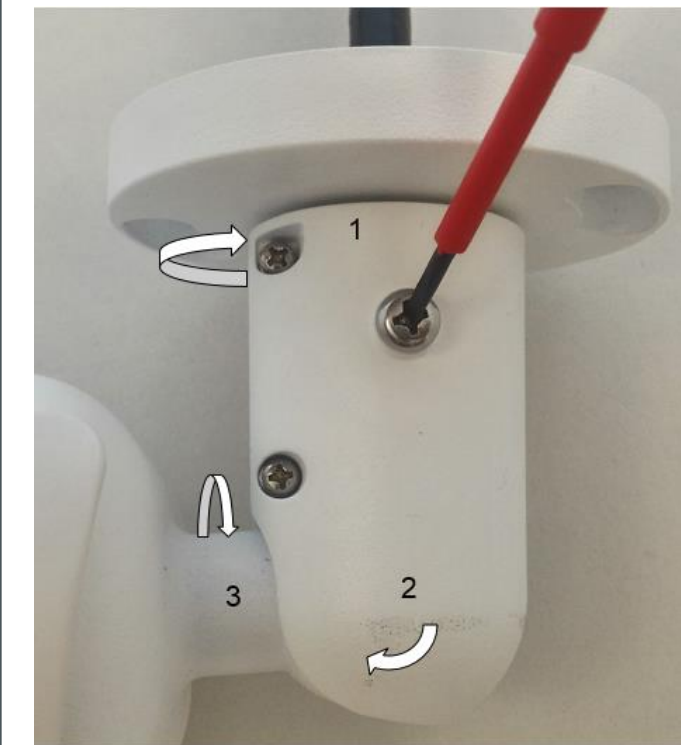


1. Pan / Pan
2. Tilt / Incliner
3. Rotate / Rotation

One screw to loosen all points / Une vis pour desserrer tous les points

### Reset button & microSD / Bouton reset & microSD

1. Remove sunshield / Démontez le pare-soleil.
2. Unscrew the front cover / Dévissez le capot avant.

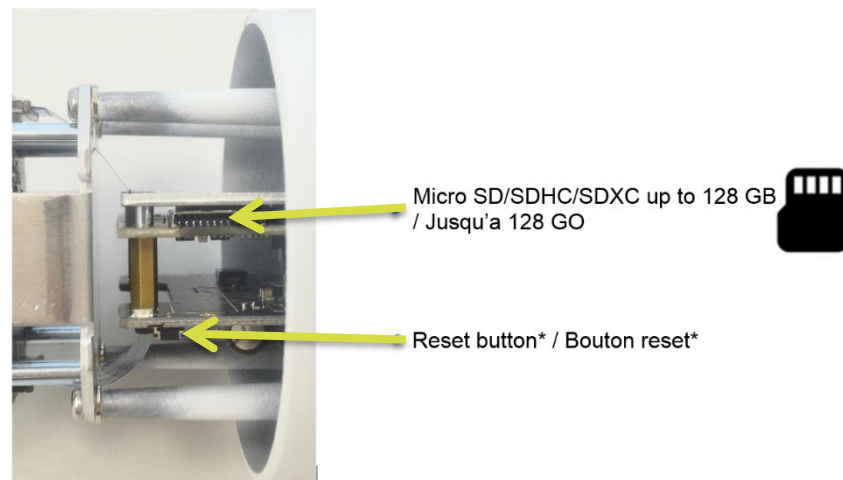

Micro SD/SDHC/SDXC up to 128 GB / Jusqu'à 128 GO

Reset button\* / Bouton reset\*



\*Reset button: Press and hold for 10 sec. when powering on or rebooting.

**Warning:** Restores factory default settings, including IP address, user name and password!

\*Bouton reset: Appuyer et maintenir 10 sec lors de l'allumage ou du reboot.

**Attention:** La remise à zéro usine supprime l'adresse IP et les mots de passe!

### Fixed IP address / Une adresse fixe



Use Device Manager (see next) to discover the camera on the network.  
Utiliser le "Device Manager (voir ci-après), pour retrouver la caméra sur le réseau.

## Install Device Manager / Installer Device Manager

1

2

3

support-files > Software > Siquira Device Manager

C:\Users\...Downloads\Siquira Device Manager.zip

File Edit View Favorites Tools Help

Name	Size
Redistributables	8 990 552
Quick Reference.pdf	1 750 867
Siquira Device Manager.exe	3 322 099

## Change IP address / Changer l'adresse IP

Siquira Device Manager

File Help

Network Interface: VideoLAN: 192.168.1.5

Device	IP Address	Netmask	Name	MAC Address
BL888M1IR	192.168.1.64	255.255.255.0		

1

2

3

Change Network Settings 192.168.1.64 BC1103

Current IP address: 192.168.1.64  
 Current Netmask: 255.255.255.0  
 Current Gateway: 0.0.0.0

Static IP

New IP address: 172.22.250.137  
 New Netmask: 255.255.0.0  
 New Gateway: 0.0.0.0

Enable DHCP

OK Cancel

## Open web interface / Ouvrir l'interface web

Siquira Device Manager

File Help

Network Interface: VideoLAN: 172.22.250.21

Device	IP Address	Netmask	Name
BC820H1	172.22.253.158	255.255.0.0	Siquira-820-series
BC820H1	172.22.253.164	255.255.0.0	Siquira-820-series-253-164
BC820H1	172.22.253.159	255.255.0.0	Siquira-820-series-253-159
BC820H1	172.22.253.156	255.255.0.0	Siquira-820-series-253-156
BC820H1-SFP	172.22.253.169	255.255.0.0	Siquira-820-series-253-169
BC840-PID	172.22.233.46	255.255.0.0	S99405971990-430630
EVE ONE	172.22.1.51	255.255.0.0	EVE ONE-418128
FD820M1IR	172.22.253.20	255.255.0.0	Siquira-820-series-253-20
FD820M1IR	172.22.253.104	255.255.0.0	Siquira-820-series-253-104
HS0820H2-E	172.22.253.26	255.255.0.0	Siquira-820-series
S-60 E	172.22.237.174	255.255.0.0	S99405975980-245258
BL888M1IR	172.22.250.137	255.255.0.0	
TC620-PID	172.22.250.39	255.255.0.0	
TrafibotHD	172.22.93.29	255.255.0.0	

1

2

Open Web Page Ctrl+W

Change Credentials in Device... Ctrl+C

Credentials used for Device... Ctrl+U

Change Name... Ctrl+N

Change Network Settings... Ctrl+H

Change Time Settings... Ctrl+T

Identify... Ctrl+I

Backup Settings... Ctrl+B

Restore Settings... Ctrl+R

Upgrade Firmware... Ctrl+F

Capabilities...

Remove device from list Del

## Log in / Se connecter

Windows Security

iexplore.exe

The server 172.19.99.31 is asking for your user name and password. The server reports that it is from MegapixelIPCamera.

Warning: Your user name and password will be sent using basic authentication on a connection that isn't secure.

Admin

Password

Remember my credentials

OK Cancel

The default user name and password are:  
**Admin**  
**1234**

For more information about user accounts and passwords, see User Manual.  
 Pour plus d'informations sur les comptes et mots de passe, voir le manuel d'utilisation.

Set a strong password now!  
 Créer un mot de passe fort maintenant!

qwerty1234 ❌

x6W@oM0a!9#F ✅

Internet Explorer

## View live video / Voir la vidéo en direct

Siquira Device Manager

Live View

Playback

System

Security

Network

Video/Audio

Events

Storage

Internet Explorer

## Adjust video / Régler les paramètres vidéo

Siquira Device Manager

Configuration

Streaming Picture Adjustment Text Overlay Privacy Mask ROI

Switch Day and Night Set: Auto-Switch

Image Adjustment

Exposure Settings

Day/Night Switch

Backlight Settings

White Balance

Image Enhancement

Video Adjustment

Mirror: OFF

Rotate: OFF

Video Standard: PAL(50HZ)

Capture Mode: 2560\*1520@20fps, 2560\*1440@25fps